

MEA® Hygienic Drainage System



MEA Modular Box Channel

MEA Drains

MEA Box Channel

MEA Group GmbH

SUCCESS IN BUILDING, BUILDING SUCCESS

- Founded in Bavaria, Germany, in 1886
- Over 130 years of experience
- Global supplier of drainage systems
- Production bases in : Germany, France, Czech Republic, China







- Adhere to German quality, 15 years experience in Chinese market
- Businesses cover Asia-Pacific, Australia, North America
- Provide the best drainage system solutions and products to customers



- Linear drainage system
- Stainless steel drainage system
- Grease separators
- Sewage lifting system

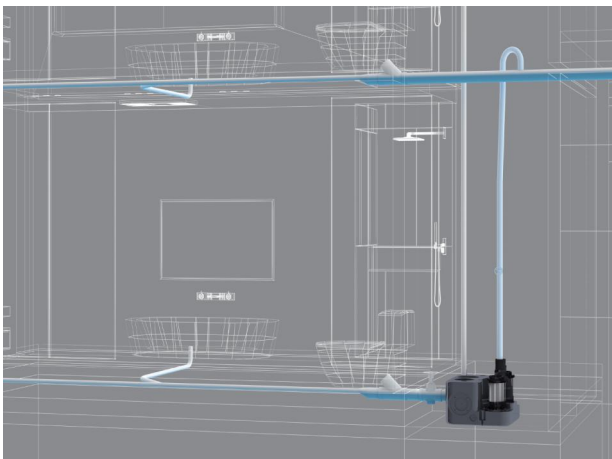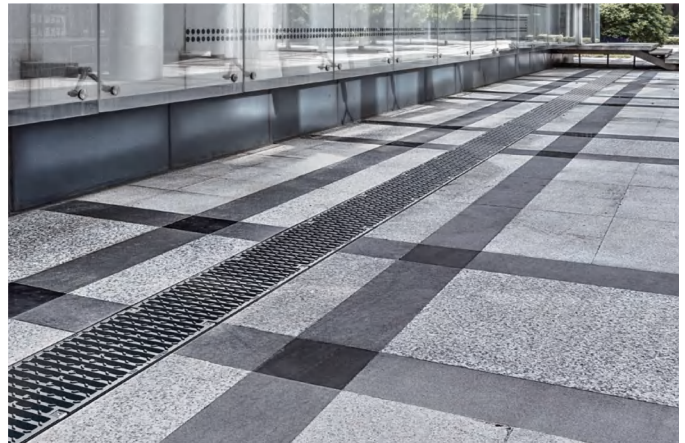

MEA Hygienic Drainage System



MEA Hygienic Drainage System, including Modular Drainage System, Drains and Box Channel, provide professional drainage solutions for a variety of applications through standardized and customized products.


Design and Technical Features

- > Modular assembly for quick installation
- > Sealed design to avoid drainage leakage
- > Internal radii $\geq 3\text{mm}$, bottom radii $\geq 10\text{mm}$, increases cleaning effectiveness
- > Edge in-fill, impact resistance, prevent harbouring microorganism
- > Optional passivation, electropolishing, shot blasting surface treatment
- > Hygienic antislip gratings
- > EU CE certification, conform to EN1253, EN16165

Advantages of Stainless Steel

- > Stainless steel 304 or 316L
- > Highly corrosion resistant and long life
- > Resistant to temperature and thermal shock
- > Smooth surface, easy to clean
- > Coefficient of linear expansion similar to concrete
- > 100% recyclable material

Modular Drainage System

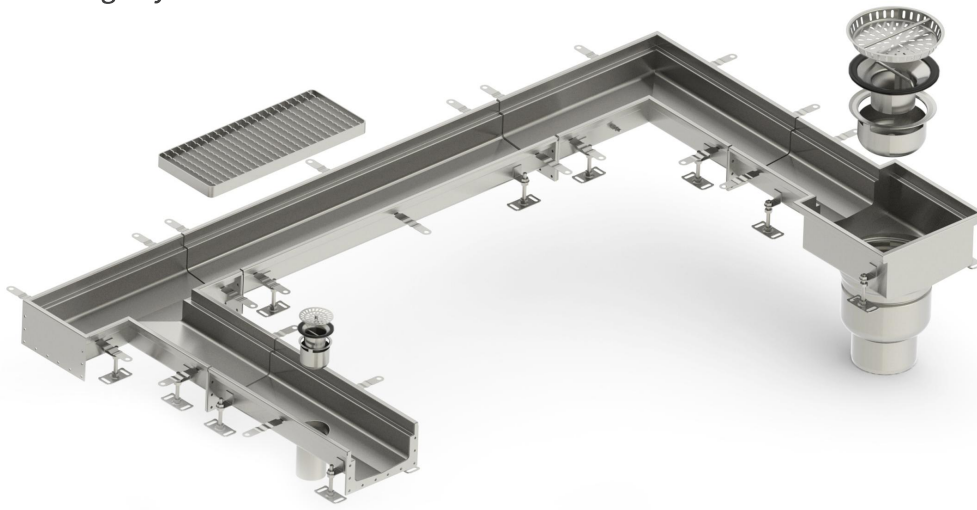

Drains





Box Channel



Grating



- > Stainless steel 304 or 316L
- > Optional passivation, electropolishing, sandblasting surface treatment
- > Hygienic antislip gratings
- > Multiple styles of gratings, matched according to the application conditions

Mesh grating

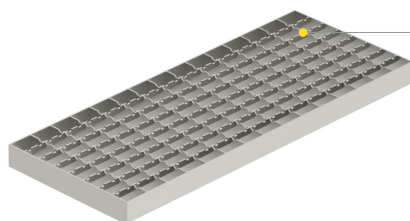


Mesh grating with either slip resistant

Ladder grating

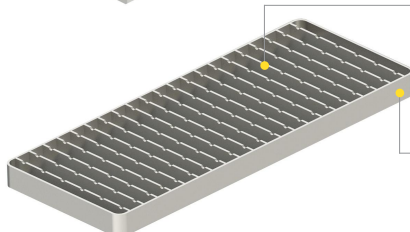


Ladder grating, hygienic and slip resistant




Rounded corners

Wedge mesh grating





Wedge design, intercept debris with a diameter greater than 6mm




With lifting hole, easy to clean and maintain

Slot grating

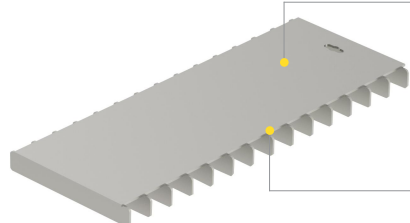



Bilateral slot drainage, slot width 10mm

Hygienic ladder grating



Ladder grating, high flow, hygienic, rounded corners

Customized grating

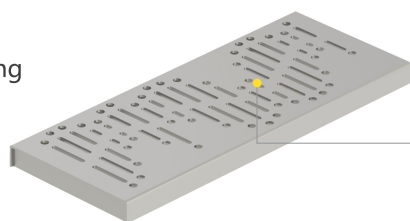

Customized patterns to suit various requirement

Load Class

INDOOR

MEA GRATINGS FOR INDOOR USE are tested and classified according to EN 1253 "Gullies for buildings".

EN1253			
Icon	Load classes	Load	Application
H1.5 	H1.5	1.5kN	No load areas
K3 	K3	3kN	Barefoot areas
L15 	L15	15kN	Pedestrian and light traffic
R50 	R50	50kN	Light traffic and light industrial areas
M125 	M125	125kN	Traffic and industrial areas
N250 	N250	250kN	Heavy traffic and heavy industrial areas
P400 	P400	400kN	Extra heavy traffic and industrial areas


OUTDOOR

MEA GRATINGS FOR OUTDOOR USE are tested and classified in accordance with EN 1433 "Drainage channels for vehicular and pedestrian areas".

EN1433			
Icon	Load classes	Load	Application
A15 	A15	15kN	Pedestrian and light traffic
B125 	B125	125kN	Car parking areas
C250 	C250	250kN	Along roads, slow traffic lane
D400 	D400	400kN	Main driving road, fast traffic lane
E600 	E600	600kN	Container and industrial areas
F900 	F900	900kN	Airports


MEA Modular Box Channel

CE Certification

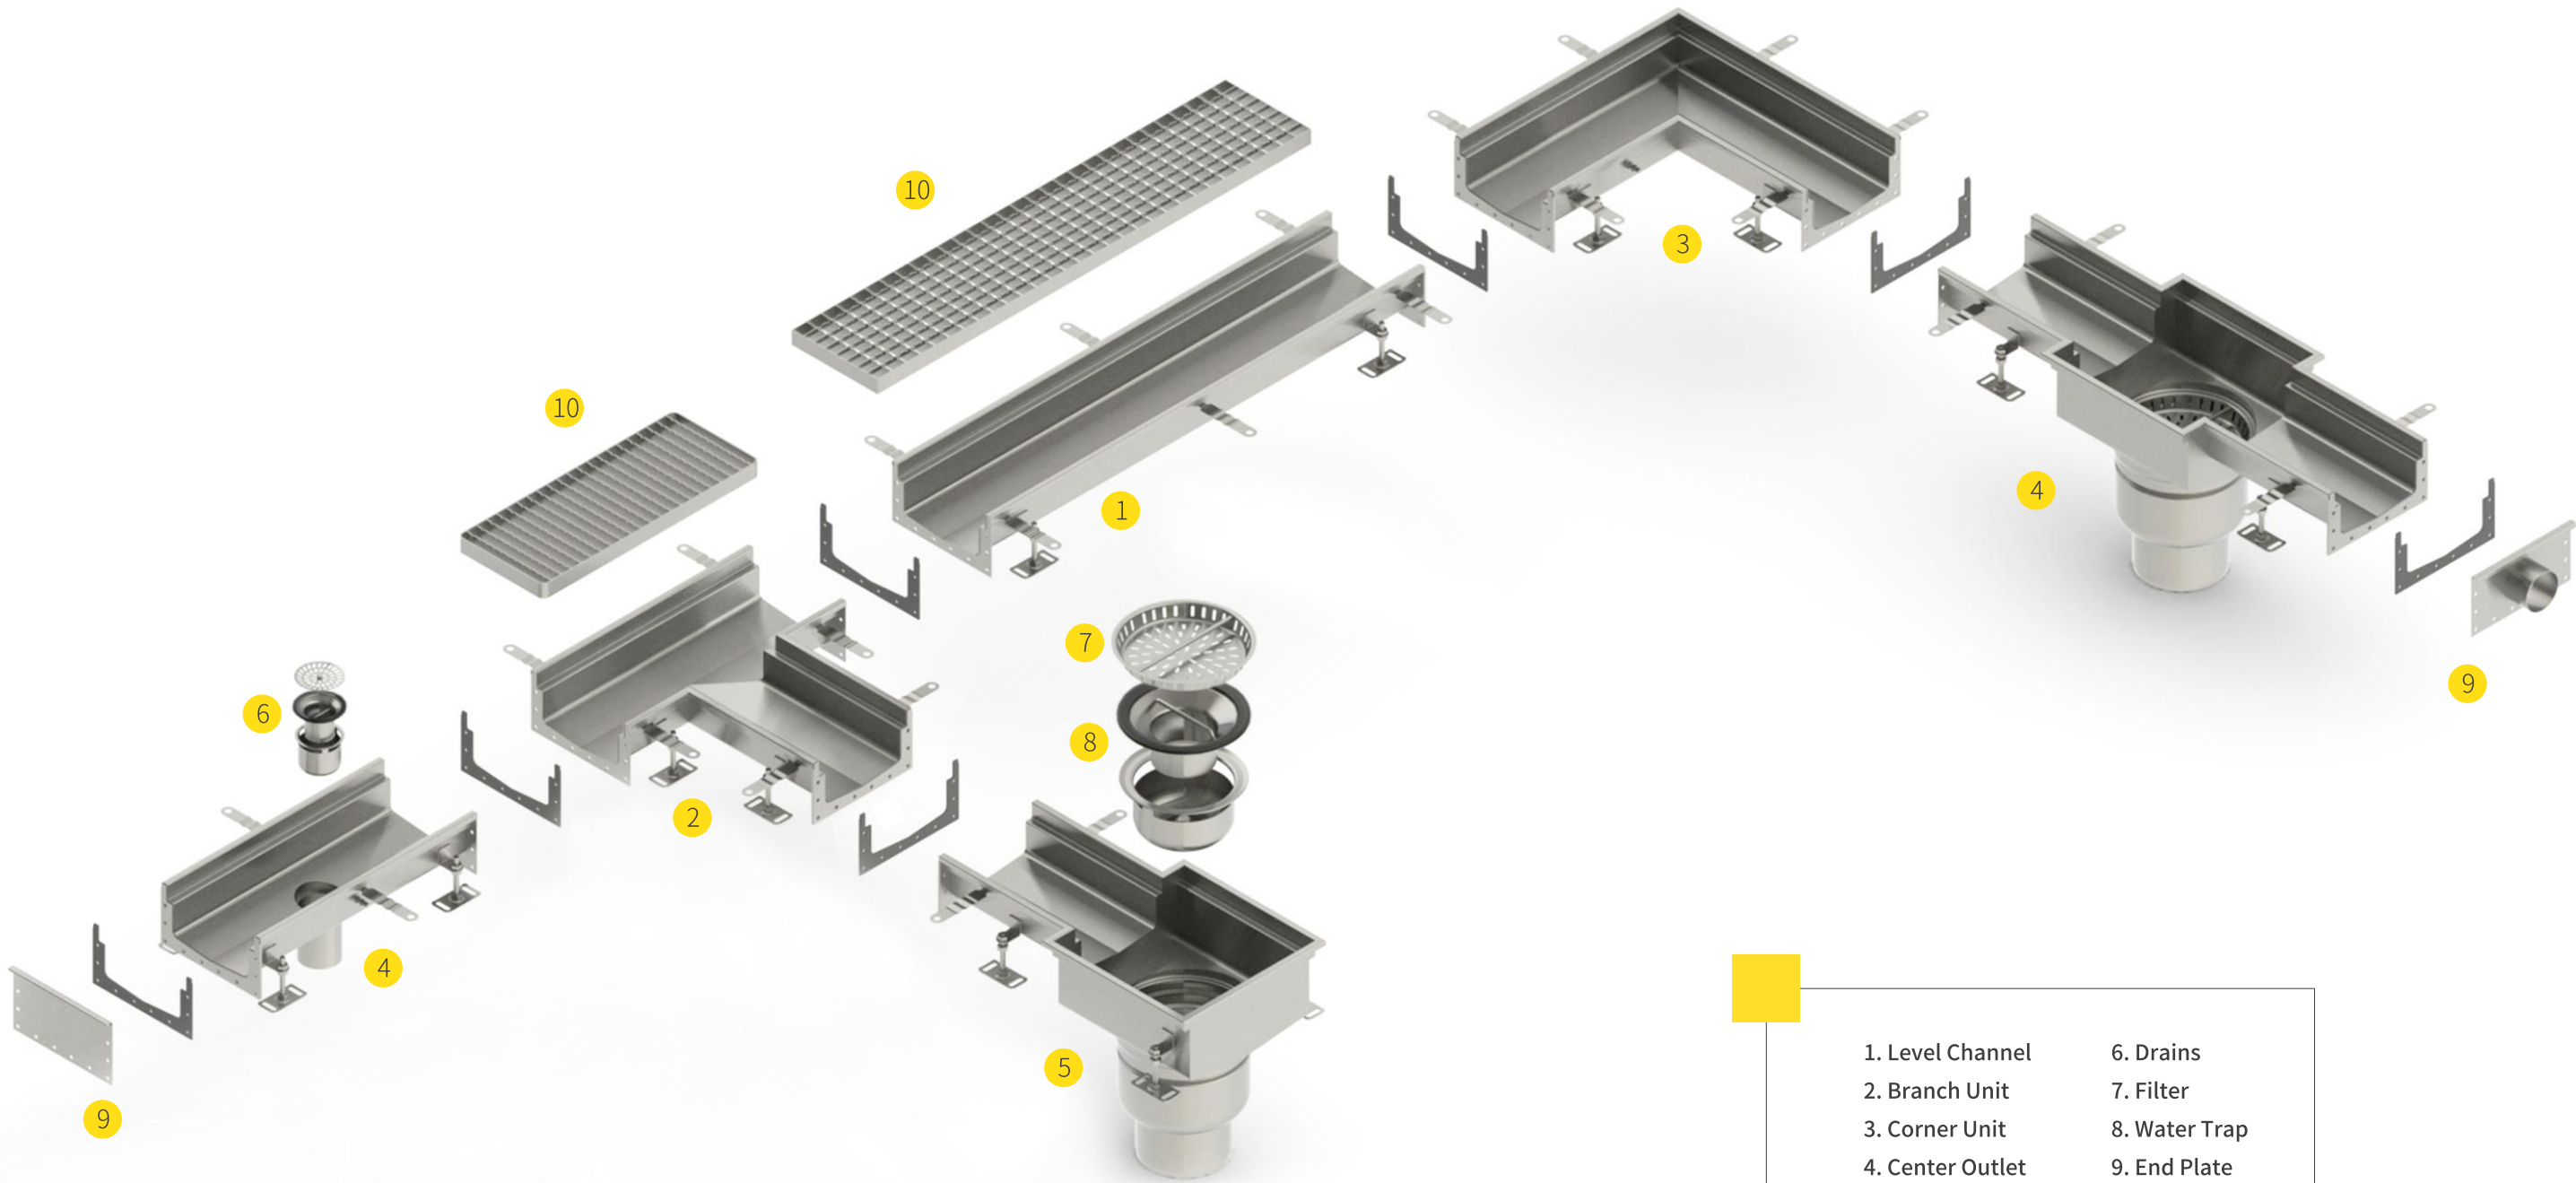


- | | |
|------------------|---------------|
| 1. Level Channel | 6. Drains |
| 2. Branch Unit | 7. Filter |
| 3. Corner Unit | 8. Water Trap |
| 4. Center Outlet | 9. End Plate |
| 5. End Outlet | 10. Grating |

Product Characteristics




- > Internal radii $\geq 3\text{mm}$, bottom radii $\geq 10\text{mm}$
- > V shape bottom, increases cleaning effectiveness
- > No welded joints




- > Edge in-fill, ensures stable and impact resistance
- > Prevent harbouring microorganism




- > Wide variety of outlet units
- > With filter and water trap



- > Adjustable legs
- > Anchor plates ensure firm installation



- > Slip resistant gratings
- > Optional pickling passivation, electropolishing, sandblasting surface treatment, durability and long life






- > Modular assembly for quick installation
- > With anti-deformation accessories for transport and installation
- > Provide customized services

Level Channel



MBC125.100.90B.L

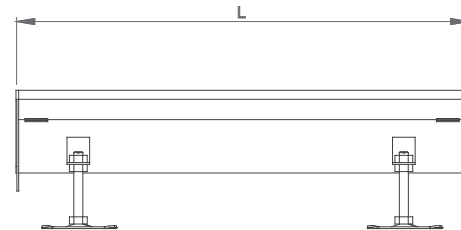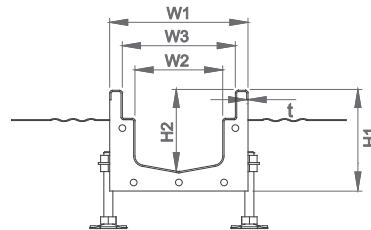



Model	L	H2	H1	W1	W2	W3	t	Material
	mm	mm	mm	mm	mm	mm	mm	
MBC125.100.60B.L	1000	60	81.5	153	97	125	1.5	304/316L
MBC125.100.60C.L	1000	60	82	155			2	304/316L
MBC125.100.110B.L	1000	110	131.5	153			1.5	304/316L
MBC125.100.110C.L	1000	110	132	155			2	304/316L
MBC200.100.60B.L	1000	60	81.5	228	172	200	1.5	304/316L
MBC200.100.60C.L	1000	60	82	230			2	304/316L
MBC200.100.250B.L	1000	250	271.5	228			1.5	304/316L
MBC200.100.250C.L	1000	250	272	230			2	304/316L
MBC250.100.70B.L	1000	70	91.5	278	222	250	1.5	304/316L
MBC250.100.70C.L	1000	70	92	280			2	304/316L
MBC250.100.350B.L	1000	350	371.5	278			1.5	304/316L
MBC250.100.350C.L	1000	350	372	280			2	304/316L
MBC300.100.70B.L	1000	70	91.5	328	272	300	1.5	304/316L
MBC300.100.70C.L	1000	70	92	330			2	304/316L
MBC300.100.450B.L	1000	450	471.5	328			1.5	304/316L
MBC300.100.450C.L	1000	450	472	330			2	304/316L

Remark: 1. $L \leq 2000$, excess size needs to be customized

2. The upper and lower limits of H2 are shown in the table, excess size needs to be customized


Branch Unit

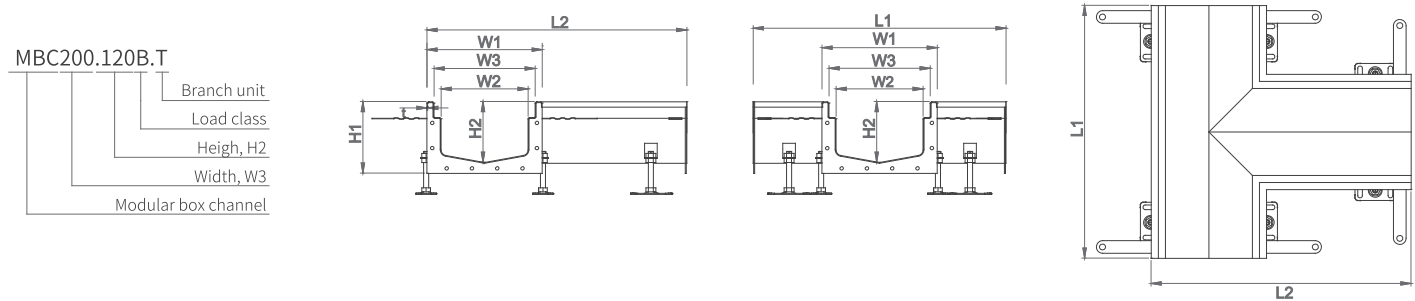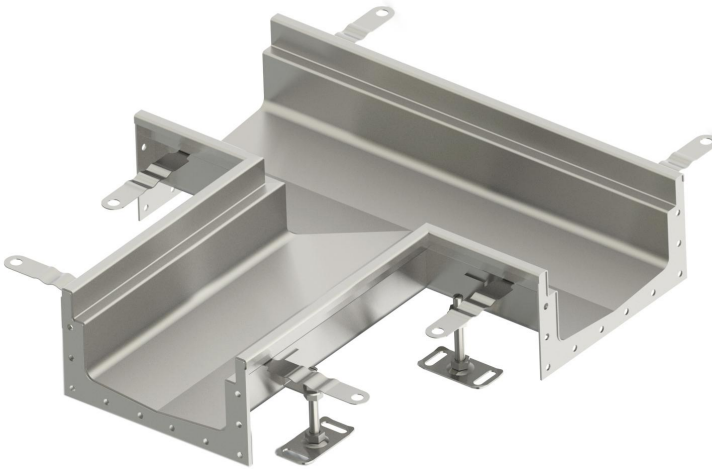




Model	L1	L2	H2	H1	W1	W2	W3	t	Material
	mm	mm	mm	mm	mm	mm	mm	mm	
MBC125.60B.T	500	514	60	81.5	153	97	125	1.5	304/316L
MBC125.60C.T	500	515	60	82	155			2	304/316L
MBC125.110B.T	500	514	110	131.5	153			1.5	304/316L
MBC125.110C.T	500	515	110	132	155			2	304/316L
MBC200.60B.T	500	514	60	81.5	228	172	200	1.5	304/316L
MBC200.60C.T	500	515	60	82	230			2	304/316L
MBC200.250B.T	500	514	250	271.5	228			1.5	304/316L
MBC200.250C.T	500	515	250	272	230			2	304/316L
MBC250.70B.T	500	514	70	91.5	278	222	250	1.5	304/316L
MBC250.70C.T	500	515	70	92	280			2	304/316L
MBC250.350B.T	500	514	350	371.5	278			1.5	304/316L
MBC250.350C.T	500	515	350	372	280			2	304/316L
MBC300.70B.T	500	514	70	91.5	328	272	300	1.5	304/316L
MBC300.70C.T	500	515	70	92	330			2	304/316L
MBC300.450B.T	500	514	450	471.5	328			1.5	304/316L
MBC300.450C.T	500	515	450	472	330			2	304/316L

Remark: 1. The upper and lower limits of H2 are shown in the table, excess size needs to be customized

Corner Unit

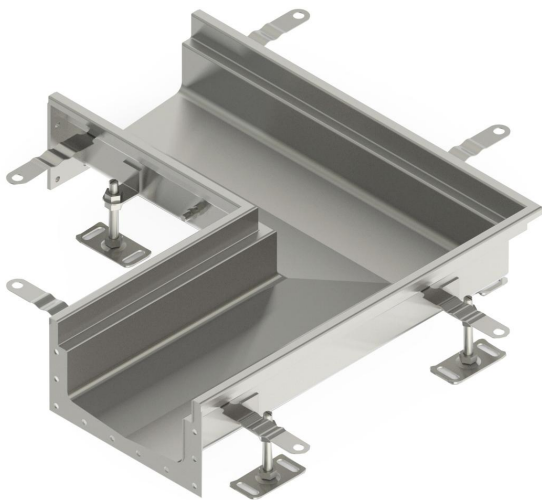



MBC200.120B.B
Corner unit
Load class
Heigh, H2
Width, W3
Modular box channel



Model	L	H2	H1	W1	W2	W3	t	Material
	mm	mm	mm	mm	mm	mm	mm	
MBC125.60B.B	514	60	81.5	153	97	125	1.5	304/316L
MBC125.60C.B	515	60	82	155			2	304/316L
MBC125.110B.B	514	110	131.5	153			1.5	304/316L
MBC125.110C.B	515	110	132	155			2	304/316L
MBC200.60B.B	514	60	81.5	228	172	200	1.5	304/316L
MBC200.60C.B	515	60	82	230			2	304/316L
MBC200.250B.B	514	250	271.5	228			1.5	304/316L
MBC200.250C.B	515	250	272	230			2	304/316L
MBC250.70B.B	514	70	91.5	278	222	250	1.5	304/316L
MBC250.70C.B	515	70	92	280			2	304/316L
MBC250.350B.B	514	350	371.5	278			1.5	304/316L
MBC250.350C.B	515	350	372	280			2	304/316L
MBC300.70B.B	514	70	91.5	328	272	300	1.5	304/316L
MBC300.70C.B	515	70	92	330			2	304/316L
MBC300.450B.B	514	450	471.5	328			1.5	304/316L
MBC300.450C.B	515	450	472	330			2	304/316L

Remark: 1. The upper and lower limits of H2 are shown in the table, excess size needs to be customized

Center Outlet with outlet box

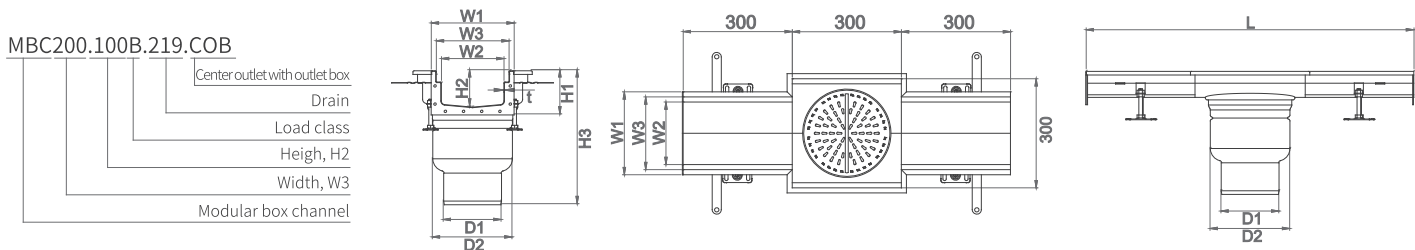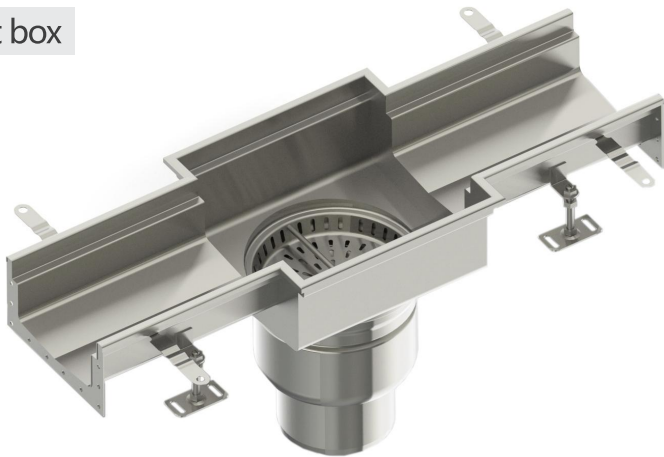

Model	L	H1	H2	H3	W1	W2	W3	D1	D2	t	Water trap	Filter	Material
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm			
MBC125.60B.159.COB	900	81.5	60	324	153	97	125	108/76	159	1.5	WT157	B167	304/316L
MBC125.60C.159.COB		82	60	324.5	155			108/76		2			304/316L
MBC125.70B.159.COB		91.5	70	324	153			108/76		1.5			304/316L
MBC125.70C.159.COB		92	70	324.5	155			108/76		2			304/316L
MBC125.110B.159.CO		131.5	110	364	153			108/76		1.5			304/316L
MBC125.110C.159.CO		132	110	364.5	155			108/76		2			304/316L
MBC125.60B.219.COB		81.5	60	338.5	153			159/108	219	1.5	WT217	B237	304/316L
MBC125.60C.219.COB		82	60	339	155			159/108		2			304/316L
MBC125.70B.219.COB		91.5	70	338.5	153			159/108		1.5			304/316L
MBC125.70C.219.COB		92	70	339	155			159/108		2			304/316L
MBC125.110B.219.CO		131.5	110	378.5	153			159/108		1.5			304/316L
MBC125.110C.219.CO		132	110	379	155			159/108		2			304/316L
MBC200.60B.159.COB	900	81.5	60	324	228	172	200	108/76	159	1.5	WT157	B167	304/316L
MBC200.60C.159.COB		82	60	324.5	230			108/76		2			304/316L
MBC200.70B.159.COB		91.5	70	324	228			108/76		1.5			304/316L
MBC200.70C.159.COB		92	70	324.5	230			108/76		2			304/316L
MBC200.250B.159.CO		271.5	250	504	228			108/76		1.5			304/316L
MBC200.250C.159.CO		272	250	504.5	230			108/76		2			304/316L
MBC200.60B.219.COB		81.5	60	338.5	228			159/108	219	1.5	WT217	B237	304/316L
MBC200.60C.219.COB		82	60	339	230			159/108		2			304/316L
MBC200.70B.219.COB		91.5	70	338.5	228			159/108		1.5			304/316L
MBC200.70C.219.COB		92	70	339	230			159/108		2			304/316L
MBC200.250B.219.CO		271.5	250	518.5	228			159/108		1.5			304/316L
MBC200.250C.219.CO		272	250	519	230			159/108		2			304/316L
MBC250.70B.159.COB	900	91.5	70	324	278	222	250	108/76	159	1.5	WT157	B167	304/316L
MBC250.70C.159.COB		92	70	324.5	280			108/76		2			304/316L
MBC250.350B.159.CO		371.5	350	604	278			108/76		1.5			304/316L
MBC250.350C.159.CO		372	350	604.5	280			108/76		2			304/316L
MBC250.70B.219.COB		91.5	70	338.5	278			159/108	219	1.5	WT217	B237	304/316L
MBC250.70C.219.COB		92	70	339	280			159/108		2			304/316L
MBC250.350B.219.CO		371.5	350	618.5	278			159/108		1.5			304/316L
MBC250.350C.219.CO		372	350	619	280			159/108		2			304/316L




Remark: 1. The upper and lower limits of H2 are shown in the table, excess size needs to be customized

Center Outlet



MBC250.120B.159.CO

Center outlet
Drain
Load class
Heigh, H2
Width, W3
Modular box channel






Model	L	H1	H2	H3	W1	W2	W3	D1	D2	t	Water trap	Filter	Material
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm			
MBC250.70B.159.CO	500	91.5	70	324	278	222	250	108/76	159	1.5	WT157	B167	304/316L
MBC250.70C.159.CO		92	70	324.5	280			108/76		2			304/316L
MBC250.350B.159.CO		371.5	350	604	278			108/76		1.5			304/316L
MBC250.350C.159.CO		372	350	604.5	280			108/76		2			304/316L
MBC300.70B.159.CO	500	91.5	70	324	328	272	300	108/76	159	1.5	WT157	B167	304/316L
MBC300.70C.159.CO		92	70	324.5	330			108/76		2			304/316L
MBC300.450B.159.CO		471.5	450	704	328			108/76		1.5			304/316L
MBC300.450C.159.CO		472	450	704.5	330			108/76		2			304/316L
MBC300.70B.219.CO		91.5	70	338.5	328			159/108	219	1.5	WT217	B237	304/316L
MBC300.70C.219.CO		92	70	339	330			159/108		2			304/316L
MBC300.450B.219.CO		471.5	450	718.5	328			159/108		1.5			304/316L
MBC300.450C.219.CO		472	450	719	330			159/108		2			304/316L

Remark: 1. The upper and lower limits of H2 are shown in the table, excess size needs to be customized

MBC200.120B.CO


Center outlet
Load class
Heigh, H2
Width, W3
Modular box channel



Model	L	H1	H2	H3	W1	W2	W3	D1	t	Water trap	Filter	Material
	mm	mm	mm	mm	mm	mm	mm	mm	mm			
MBC200.60B.CO	500	81.5	60	181.5	228	172	200	110	1.5	WT108	B110	304/316L
MBC200.60C.CO		82	60	182	230			110	2			304/316L
MBC200.250B.CO		271.5	250	371.5	228			110	1.5			304/316L
MBC200.250C.CO		272	250	372	230			110	2			304/316L

Remark: 1. The upper and lower limits of H2 are shown in the table, excess size needs to be customized

End Outlet with outlet box

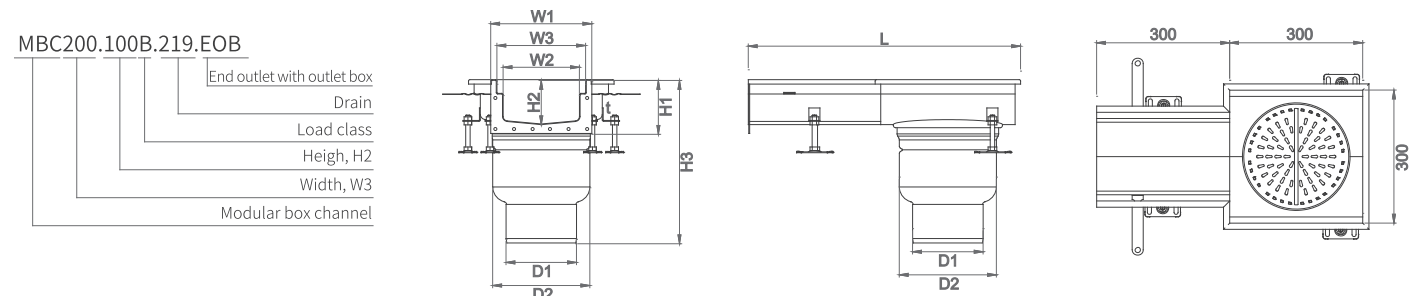

Model	L	H1	H2	H3	W1	W2	W3	D1	D2	t	Water trap	Filter	Material
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm			
MBC125.60B.159.EOB	614	81.5	60	324	153	97	125	108/76	159	1.5	WT157	B167	304/316L
MBC125.60C.159.EOB		82	60	324.5	155			108/76		2			304/316L
MBC125.70B.159.EOB		91.5	70	324	153			108/76		1.5			304/316L
MBC125.70C.159.EOB		92	70	324.5	155			108/76		2			304/316L
MBC125.110B.159.EOB		131.5	110	364	153			108/76		1.5			304/316L
MBC125.110C.159.EOB		132	110	364.5	155			108/76		2			304/316L
MBC125.60B.219.EOB		81.5	60	338.5	153			159/108	219	1.5	WT217	B237	304/316L
MBC125.60C.219.EOB		82	60	339	155			159/108		2			304/316L
MBC125.70B.219.EOB		91.5	70	338.5	153			159/108		1.5			304/316L
MBC125.70C.219.EOB		92	70	339	155			159/108		2			304/316L
MBC125.110B.219.EOB		131.5	110	378.5	153			159/108		1.5			304/316L
MBC125.110C.219.EOB		132	110	379	155			159/108		2			304/316L
MBC200.60B.159.EOB	614	81.5	60	324	228	172	200	108/76	159	1.5	WT157	B167	304/316L
MBC200.60C.159.EOB		82	60	324.5	230			108/76		2			304/316L
MBC200.70B.159.EOB		91.5	70	324	228			108/76		1.5			304/316L
MBC200.70C.159.EOB		92	70	324.5	230			108/76		2			304/316L
MBC200.250B.159.EOB		271.5	250	504	228			108/76		1.5			304/316L
MBC200.250C.159.EOB		272	250	504.5	230			108/76		2			304/316L
MBC200.60B.219.EOB		81.5	60	338.5	228			159/108	219	1.5	WT217	B237	304/316L
MBC200.60C.219.EOB		82	60	339	230			159/108		2			304/316L
MBC200.70B.219.EOB		91.5	70	338.5	228			159/108		1.5			304/316L
MBC200.70C.219.EOB		92	70	339	230			159/108		2			304/316L
MBC200.250B.219.EOB		271.5	250	518.5	228			159/108		1.5			304/316L
MBC200.250C.219.EOB		272	250	519	230			159/108		2			304/316L
MBC250.70B.159.EOB	614	91.5	70	324	278	222	250	108/76	159	1.5	WT157	B167	304/316L
MBC250.70C.159.EOB		92	70	324.5	280			108/76		2			304/316L
MBC250.350B.159.EOB		371.5	350	604	278			108/76		1.5			304/316L
MBC250.350C.159.EOB		372	350	604.5	280			108/76		2			304/316L
MBC250.70B.219.EOB		91.5	70	338.5	278			159/108	219	1.5	WT217	B237	304/316L
MBC250.70C.219.EOB		92	70	339	280			159/108		2			304/316L
MBC250.350B.219.EOB		371.5	350	618.5	278			159/108		1.5			304/316L
MBC250.350C.219.EOB		372	350	619	280			159/108		2			304/316L



Remark: 1. The upper and lower limits of H2 are shown in the table, excess size needs to be customized

End Outlet



MBC250.120B.159.EO

End outlet
Drain
Load class
Heigh, H2
Width, W3
Modular box channel


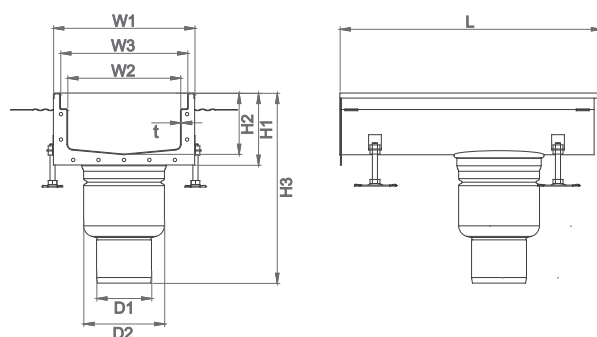


Model	L	H1	H2	H3	W1	W2	W3	D1	D2	t	Water trap	Filter	Material
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm			
MBC250.70B.159.EO	514	91.5	70	324	278	222	250	108/76	159	1.5	WT157	B167	304/316L
MBC250.70C.159.EO		92	70	324.5	280			108/76		2			304/316L
MBC250.350B.159.EO		371.5	350	604	278			108/76		1.5			304/316L
MBC250.350C.159.EO		372	350	604.5	280			108/76		2			304/316L
MBC300.70B.159.EO	514	91.5	70	324	328	272	300	108/76	159	1.5	WT157	B167	304/316L
MBC300.70C.159.EO		92	70	324.5	330			108/76		2			304/316L
MBC300.450B.159.EO		471.5	450	704	328			108/76		1.5			304/316L
MBC300.450C.159.EO		472	450	704.5	330			108/76		2			304/316L
MBC300.70B.219.EO		91.5	70	338.5	328			159/108	219	1.5	WT217	B237	304/316L
MBC300.70C.219.EO		92	70	339	330			159/108		2			304/316L
MBC300.450B.219.EO		471.5	450	718.5	328			159/108		1.5			304/316L
MBC300.450C.219.EO		472	450	719	330			159/108		2			304/316L

Remark: 1. The upper and lower limits of H2 are shown in the table, excess size needs to be customized

MBC200.120B.EO


End outlet
Load class
Heigh, H2
Width, W3
Modular box channel

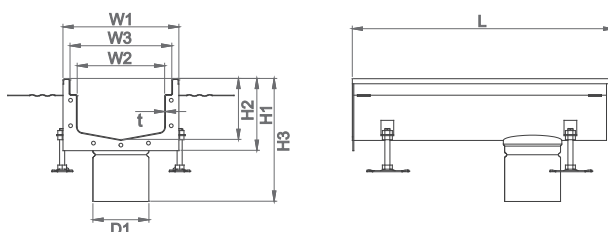



Model	L	H1	H2	H3	W1	W2	W3	D1	t	Water trap	Filter	Material
	mm	mm	mm	mm	mm	mm	mm	mm	mm			
MBC200.60B.EO	514	81.5	60	181.5	228	172	200	110	1.5	WT108	B110	304/316L
MBC200.60C.EO		82	60	182	230			110	2			304/316L
MBC200.250B.EO		271.5	250	371.5	228			110	1.5			304/316L
MBC200.250C.EO		272	250	372	230			110	2			304/316L

Remark: 1. The upper and lower limits of H2 are shown in the table, excess size needs to be customized


Gratings



Model	Product (Installation effect)	Load class EN1253	Width	Length	Material
Ladder grating					
MBC-G125.375L(Ladder)		≤N250	125	375	304/316L
MBC-G125.500L(Ladder)		≤N250	125	500	304/316L
MBC-G125.1000L(Ladder)		≤N250	125	1000	304/316L
MBC-G200.300L(Ladder)		≤N250	200	300	304/316L
MBC-G200.500L(Ladder)		≤N250	200	500	304/316L
MBC-G200.1000L(Ladder)		≤N250	200	1000	304/316L
MBC-G250.250L(Ladder)		≤M125	250	250	304/316L
MBC-G250.500L(Ladder)		≤M125	250	500	304/316L
MBC-G250.1000L(Ladder)		≤M125	250	1000	304/316L
MBC-G300.200L(Ladder)		≤M125	300	200	304/316L
MBC-G300.500L(Ladder)		≤M125	300	500	304/316L
MBC-G300.1000L(Ladder)		≤M125	300	1000	304/316L
Mesh grating					
MBC-G125.375L(Mesh)		≤M125	125	375	304/316L
MBC-G125.500L(Mesh)		≤M125	125	500	304/316L
MBC-G125.1000L(Mesh)		≤M125	125	1000	304/316L
MBC-G200.300L(Mesh)		≤M125	200	300	304/316L
MBC-G200.500L(Mesh)		≤M125	200	500	304/316L
MBC-G200.1000L(Mesh)		≤M125	200	1000	304/316L
MBC-G250.250L(Mesh)		≤L15	250	250	304/316L
MBC-G250.500L(Mesh)		≤L15	250	500	304/316L
MBC-G250.1000L(Mesh)		≤L15	250	1000	304/316L
MBC-G300.200L(Mesh)		≤L15	300	200	304/316L
MBC-G300.500L(Mesh)		≤L15	300	500	304/316L
MBC-G300.1000L(Mesh)		≤L15	300	1000	304/316L
Wedge mesh grating					
MBC-G125.375L(Wedge)		≤N250	125	375	304/316L
MBC-G125.500L(Wedge)		≤N250	125	500	304/316L
MBC-G125.1000L(Wedge)		≤N250	125	1000	304/316L
MBC-G200.300L(Wedge)		≤N250	200	300	304/316L
MBC-G200.500L(Wedge)		≤N250	200	500	304/316L
MBC-G200.1000L(Wedge)		≤N250	200	1000	304/316L
MBC-G250.250L(Wedge)		≤M125	250	250	304/316L
MBC-G250.500L(Wedge)		≤M125	250	500	304/316L
MBC-G250.1000L(Wedge)		≤M125	250	1000	304/316L
MBC-G300.200L(Wedge)		≤M125	300	200	304/316L
MBC-G300.500L(Wedge)		≤M125	300	500	304/316L
MBC-G300.1000L(Wedge)		≤M125	300	1000	304/316L

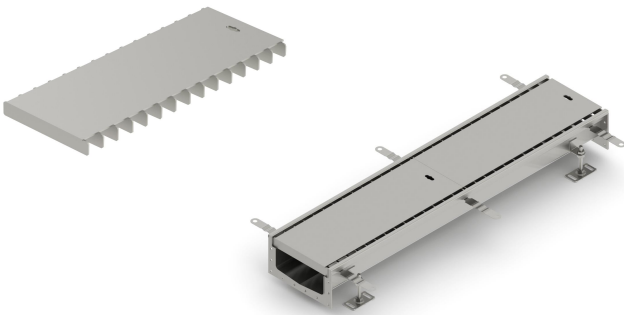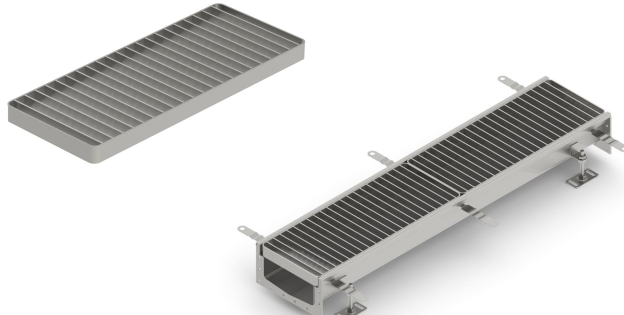Model	Product (Installation effect)	Load class EN1253	Width	Length	Material
Slot grating					
MBC-G125.375L(Slot)		≤N250	125	375	304/316L
MBC-G125.500L(Slot)		≤N250	125	500	304/316L
MBC-G125.1000L(Slot)		≤N250	125	1000	304/316L
MBC-G200.300L(Slot)		≤N250	200	300	304/316L
MBC-G200.500L(Slot)		≤N250	200	500	304/316L
MBC-G200.1000L(Slot)		≤N250	200	1000	304/316L
MBC-G250.250L(Slot)		≤M125	250	250	304/316L
MBC-G250.500L(Slot)		≤M125	250	500	304/316L
MBC-G250.1000L(Slot)		≤M125	250	1000	304/316L
MBC-G300.200L(Slot)		≤M125	300	200	304/316L
MBC-G300.500L(Slot)		≤M125	300	500	304/316L
MBC-G300.1000L(Slot)		≤M125	300	1000	304/316L
Hygienic ladder grating					
MBC-G125.375L(H-ladder)		≤N250	125	375	304/316L
MBC-G125.500L(H-ladder)		≤N250	125	500	304/316L
MBC-G125.1000L(H-ladder)		≤N250	125	1000	304/316L
MBC-G200.300L(H-ladder)		≤N250	200	300	304/316L
MBC-G200.500L(H-ladder)		≤N250	200	500	304/316L
MBC-G200.1000L(H-ladder)		≤N250	200	1000	304/316L
MBC-G250.250L(H-ladder)		≤M125	250	250	304/316L
MBC-G250.500L(H-ladder)		≤M125	250	500	304/316L
MBC-G250.1000L(H-ladder)		≤M125	250	1000	304/316L
MBC-G300.200L(H-ladder)		≤M125	300	200	304/316L
MBC-G300.500L(H-ladder)		≤M125	300	500	304/316L
MBC-G300.1000L(H-ladder)		≤M125	300	1000	304/316L

Accessories

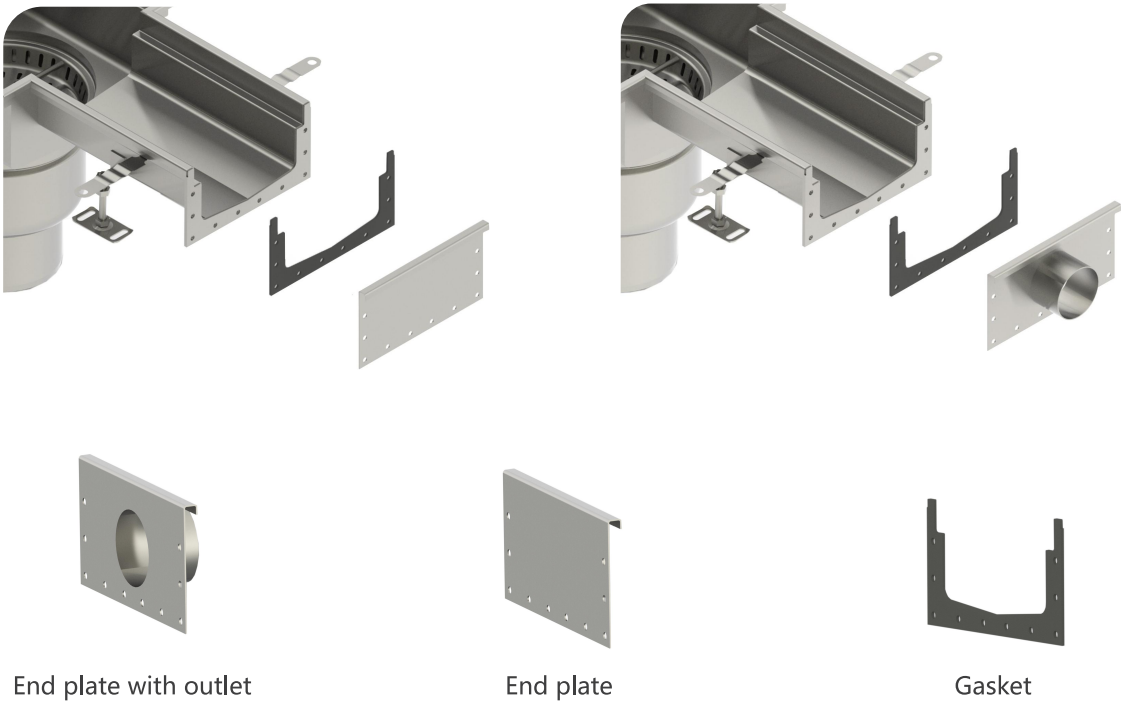

2mm thickness end plate, customized outlet diameter.


MEA Drains

 CE CE Certification




Product Characteristics

- > Stainless steel 304 or 316L
- > Slip resistant gratings
- > With filter and removable water trap
- > The depth of water seal $\geq 50\text{mm}$
- > Smooth surface, easy to clean and disinfect
- > Quick installation

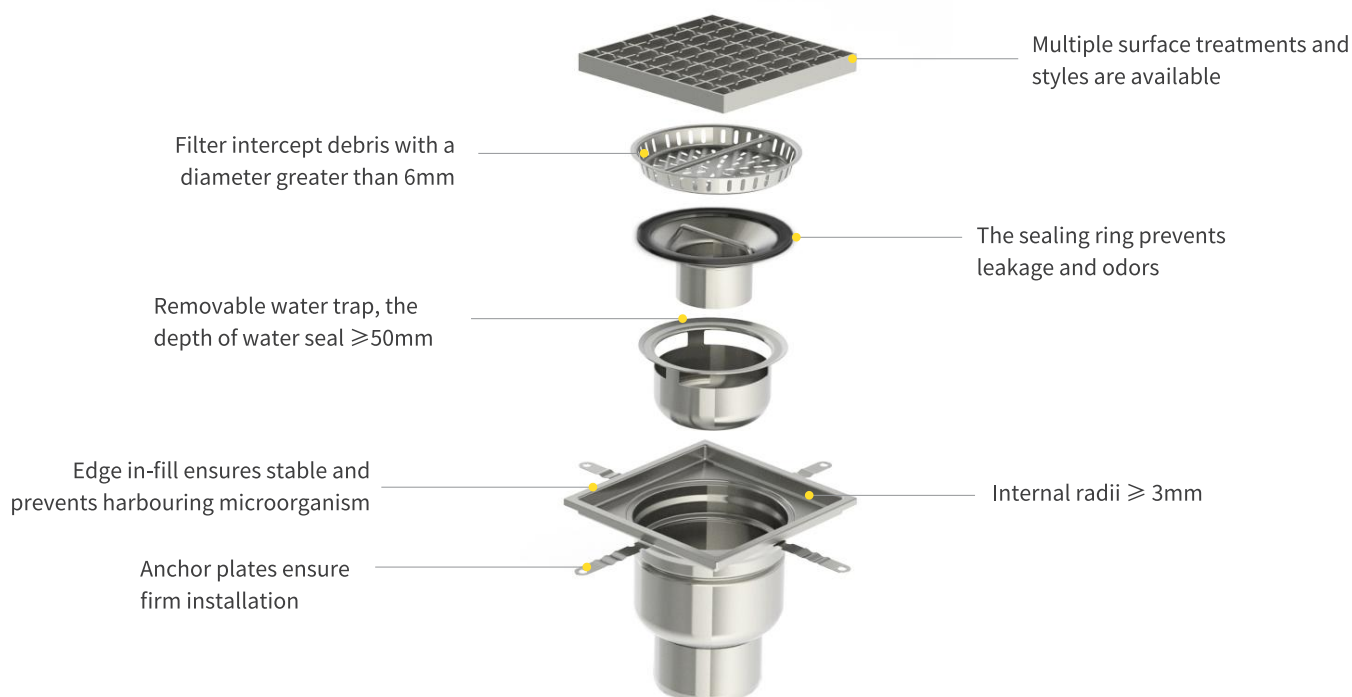



Technical Parameter



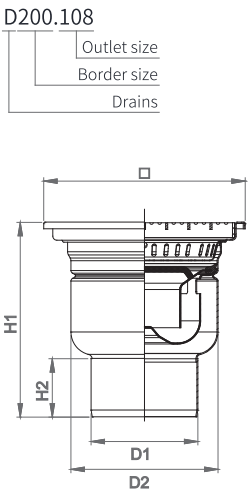


Model	Size	D1	D2	H1	H2	Water seal depth	Material	Water trap	Filter	Grating size
	mm	Φmm	Φmm	mm	mm	mm				mm
D200.76	200X200	76	159	275	80	50	304/316L	WT157	B167	168X168
D200.108		108			85					
D250.76	250X250	76			80					218X218
D250.108		108			85					
D300.76	300X300	76	219	290	80			WT217	B237	268X268
D300.108		108			80					
D300.159	300X300	159			87					318X318
D350.108		108			80					
D350.159	350X350	159			87					368X368
D400.108		108			80					
D400.159	400X400	159			87					

Gratings



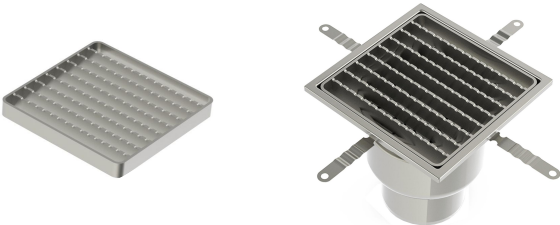Model	Product (Installation effect)	Load class EN1253	Width	Length	Material
Ladder grating					
D-G168.168N(Ladder)		≤N250	168	168	304/316L
D-G218.218N(Ladder)		≤N250	218	218	304/316L
D-G268.268N(Ladder)		≤N250	268	268	304/316L
D-G318.318N(Ladder)		≤N250	318	318	304/316L
D-G368.368N(Ladder)		≤N250	368	368	304/316L
Mesh grating					
D-G168.168N(Mesh)		≤N250	168	168	304/316L
D-G218.218N(Mesh)		≤N250	218	218	304/316L
D-G268.268N(Mesh)		≤N250	268	268	304/316L
D-G318.318N(Mesh)		≤N250	318	318	304/316L
D-G368.368N(Mesh)		≤N250	368	368	304/316L

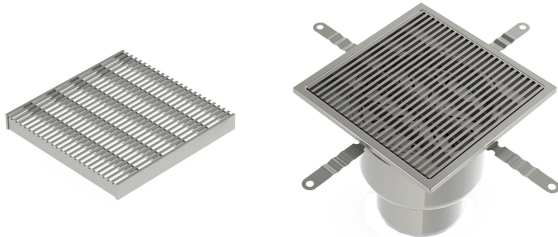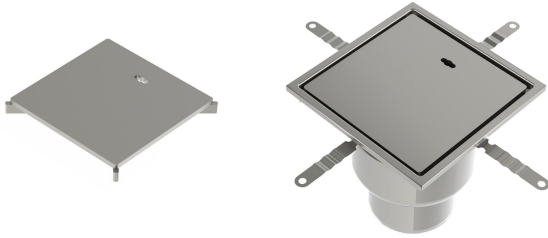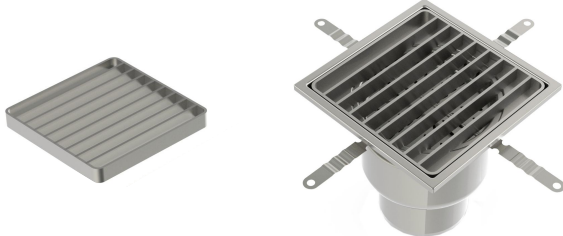Model	Product (Installation effect)	Load class EN1253	Width	Length	Material
Wedge mesh grating					
D-G168.168N(Wedge)		≤N250	168	168	304/316L
D-G218.218N(Wedge)		≤N250	218	218	304/316L
D-G268.268N(Wedge)		≤N250	268	268	304/316L
D-G318.318N(Wedge)		≤N250	318	318	304/316L
D-G368.368N(Wedge)		≤N250	368	368	304/316L
Slot grating					
D-G168.168N(Slot)		≤N250	168	168	304/316L
D-G218.218N(Slot)		≤N250	218	218	304/316L
D-G268.268N(Slot)		≤N250	268	268	304/316L
D-G318.318N(Slot)		≤N250	318	318	304/316L
D-G368.368N(Slot)		≤N250	368	368	304/316L
Hygienic ladder grating					
D-G168.168N(H-ladder)		≤N250	168	168	304/316L
D-G218.218N(H-ladder)		≤N250	218	218	304/316L
D-G268.268N(H-ladder)		≤N250	268	268	304/316L
D-G318.318N(H-ladder)		≤N250	318	318	304/316L
D-G368.368N(H-ladder)		≤N250	368	368	304/316L


MEA Box Channel

 CE Certification




Product Characteristics


- > Stainless steel 304 or 316L
- > Slip resistant gratings
- > Internal radii $\geq 3\text{mm}$, bottom radii $\geq 10\text{mm}$
- > V shape bottom, increases cleaning effectiveness
- > Edge in-fill, ensures stable
- > Wide variety of outlet units, with filter and water trap
- > Smooth surface, easy to clean and disinfect
- > Customizable size

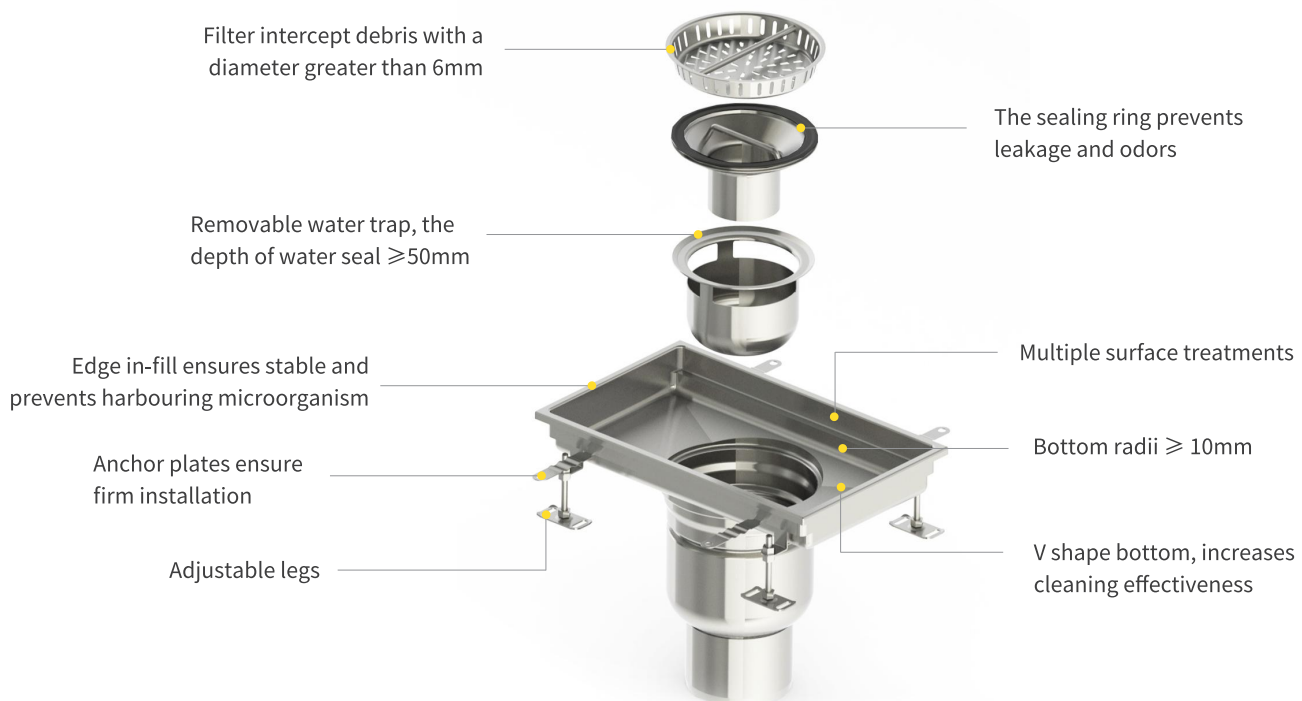

Technical Parameter

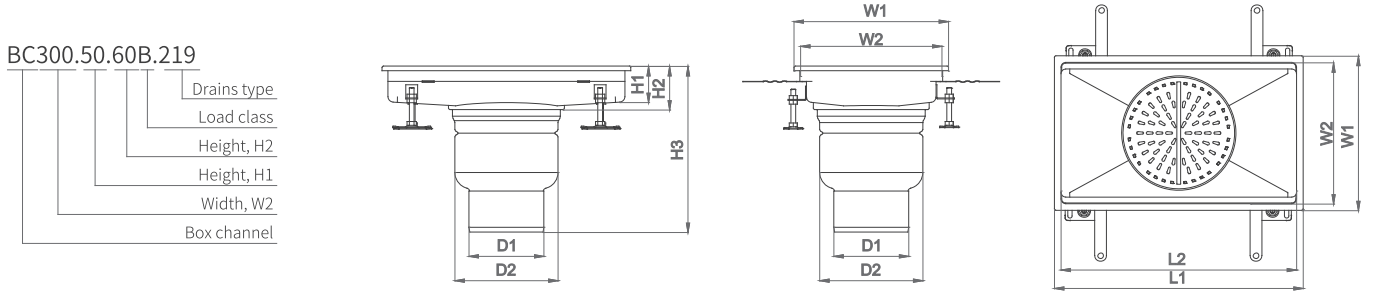






Model	L1	L2	H1	H2	H3	W1	W2	D1	D2	t	Water trap	Filter	Material
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm			
BC250.50.60B.159	528	500	50	60	305.5	278	250	108/76	159	1.5	WT157	B167	304/316L
BC250.50.60B.159	1028	1000	50	60	305.5	278	250	108/76		1.5			304/316L
BC250.50.60C.159	530	500	50	60	305.5	280	250	108/76		2			304/316L
BC250.50.60C.159	1030	1000	50	60	305.5	280	250	108/76		2			304/316L
BC300.50.60B.159	528	500	50	60	305.5	328	300	108/76	159	1.5	WT157	B167	304/316L
BC300.50.60B.159	1028	1000	50	60	305.5	328	300	108/76		1.5			304/316L
BC300.50.70B.159	528	500	50	70	315.5	328	300	108/76		1.5			304/316L
BC300.50.70B.159	1028	1000	50	70	315.5	328	300	108/76		1.5			304/316L
BC300.50.80B.159	528	500	50	80	325.5	328	300	108/76		1.5			304/316L
BC300.50.80B.159	1028	1000	50	80	325.5	328	300	108/76		1.5			304/316L
BC300.50.60C.159	530	500	50	60	305.5	330	300	108/76		2			304/316L
BC300.50.60C.159	1030	1000	50	60	305.5	330	300	108/76		2			304/316L
BC300.50.70C.159	530	500	50	70	315.5	330	300	108/76		2			304/316L
BC300.50.70C.159	1030	1000	50	70	315.5	330	300	108/76		2			304/316L
BC300.50.80C.159	530	500	50	80	325.5	330	300	108/76		2			304/316L
BC300.50.80C.159	1030	1000	50	80	325.5	330	300	108/76		2			304/316L
BC300.50.60B.219	528	500	50	60	320	328	300	159/108		1.5			304/316L
BC300.50.60B.219	1028	1000	50	60	320	328	300	159/108		1.5			304/316L
BC300.50.70B.219	528	500	50	70	330	328	300	159/108		1.5			304/316L
BC300.50.70B.219	1028	1000	50	70	330	328	300	159/108		1.5			304/316L
BC300.50.80B.219	528	500	50	80	340	328	300	159/108	219	1.5	WT217	B237	304/316L
BC300.50.80B.219	1028	1000	50	80	340	328	300	159/108		1.5			304/316L
BC300.50.60C.219	530	500	50	60	320	330	300	159/108		2			304/316L
BC300.50.60C.219	1030	1000	50	60	320	330	300	159/108		2			304/316L
BC300.50.70C.219	530	500	50	70	330	330	300	159/108		2			304/316L
BC300.50.70C.219	1030	1000	50	70	330	330	300	159/108		2			304/316L
BC300.50.80C.219	530	500	50	80	340	330	300	159/108		2			304/316L
BC300.50.80C.219	1030	1000	50	80	340	330	300	159/108		2			304/316L

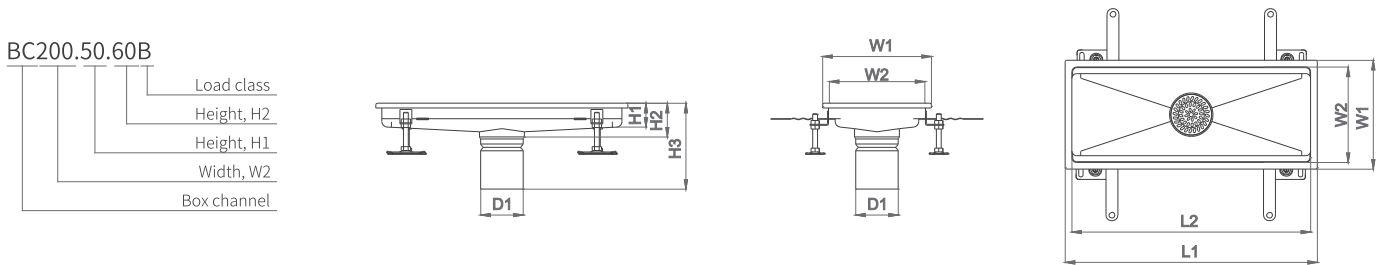

Model	L1	L2	H1	H2	H3	W1	W2	D1	t	Water trap	Filter	Material
	mm	mm	mm	mm	mm	mm	mm	mm	mm			
BC200.50.60B	528	500	50	60	165	228	200	110	1.5	WT108	B110	304/316L
BC200.50.60B	1028	1000	50	60	165	228	200	110	1.5			304/316L
BC200.50.60C	530	500	50	60	165	230	200	110	2			304/316L
BC200.50.60C	1030	1000	50	60	165	230	200	110	2			304/316L


Gratings

BC-G200.500L(Ladder)
 Grating type
 Load class
 Length
 Width
 Box channel grating

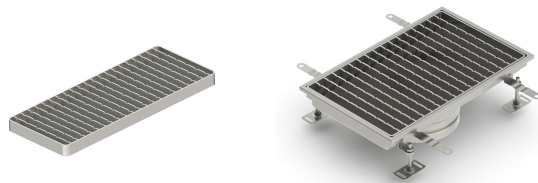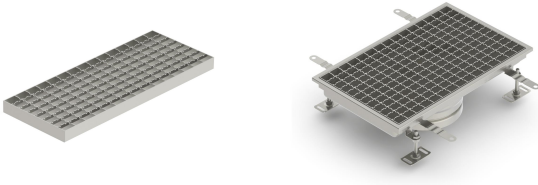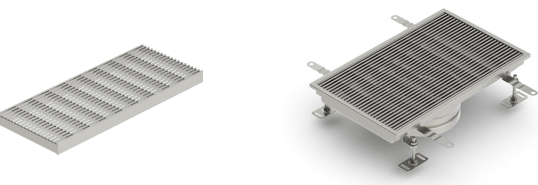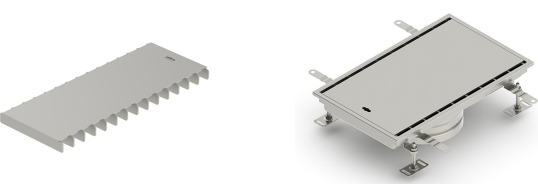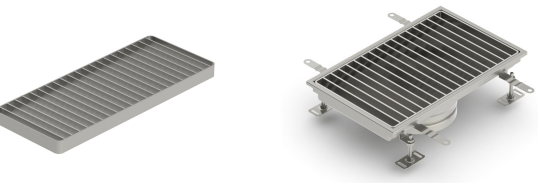
Model	Product (Installation effect)	Load class EN1253	Width	Length	Material
Ladder grating					
BC-G200.500L(Ladder)		≤N250	200	500	304/316L
BC-G200.1000L(Ladder)		≤N250	200	1000	304/316L
BC-G250.500L(Ladder)		≤M125	250	500	304/316L
BC-G250.1000L(Ladder)		≤M125	250	1000	304/316L
BC-G300.500L(Ladder)		≤M125	300	500	304/316L
BC-G300.1000L(Ladder)		≤M125	300	1000	304/316L
Mesh grating					
BC-G200.500L(Mesh)		≤M125	200	500	304/316L
BC-G200.1000L(Mesh)		≤M125	200	1000	304/316L
BC-G250.500L(Mesh)		≤M125	250	500	304/316L
BC-G250.1000L(Mesh)		≤M125	250	1000	304/316L
BC-G300.500L(Mesh)		≤L15	300	500	304/316L
BC-G300.1000L(Mesh)		≤L15	300	1000	304/316L
Wedge mesh grating					
BC-G200.500L(Wedge)		≤N250	200	500	304/316L
BC-G200.1000L(Wedge)		≤N250	200	1000	304/316L
BC-G250.500L(Wedge)		≤M125	250	500	304/316L
BC-G250.1000L(Wedge)		≤M125	250	1000	304/316L
BC-G300.500L(Wedge)		≤M125	300	500	304/316L
BC-G300.1000L(Wedge)		≤M125	300	1000	304/316L
Slot grating					
BC-G200.500L(Slot)		≤N250	200	500	304/316L
BC-G200.1000L(Slot)		≤N250	200	1000	304/316L
BC-G250.500L(Slot)		≤M125	250	500	304/316L
BC-G250.1000L(Slot)		≤M125	250	1000	304/316L
BC-G300.500L(Slot)		≤M125	300	500	304/316L
BC-G300.1000L(Slot)		≤M125	300	1000	304/316L
Hygienic ladder grating					
BC-G200.500L(H-ladder)		≤N250	200	500	304/316L
BC-G200.1000L(H-ladder)		≤N250	200	1000	304/316L
BC-G250.500L(H-ladder)		≤M125	250	500	304/316L
BC-G250.1000L(H-ladder)		≤M125	250	1000	304/316L
BC-G300.500L(H-ladder)		≤M125	300	500	304/316L
BC-G300.1000L(H-ladder)		≤M125	300	1000	304/316L

Accessories

Filter




Model	D	H
	mm	mm
B167	167	30
B237	237	30




Model	D	H
	mm	mm
B110	110	14

Water Trap



Model	D1	D2
	mm	mm
WT157	119	157
WT217	167	217




Model	D1	D2
	mm	mm
WT108	82	108

MEA Customized Services

MEA Hygiene drainage system can provide professional customized services according to project requirements.

Customizable longitudinal drainage slope

MEA modular drainage system can be customized with longitudinal drainage slope according to the project to improve drainage efficiency.

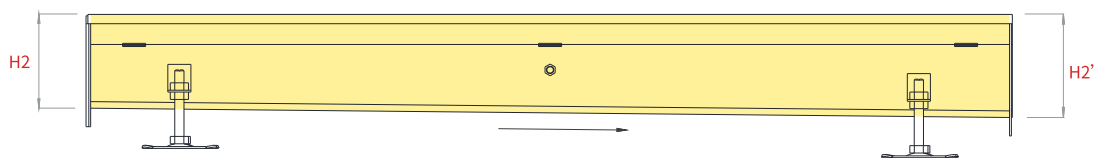


Customizable slot products

MEA Hygiene drainage system customizable slot products.






Customizable patterned grating

MEA Hygiene drainage system customizable patterned grating.

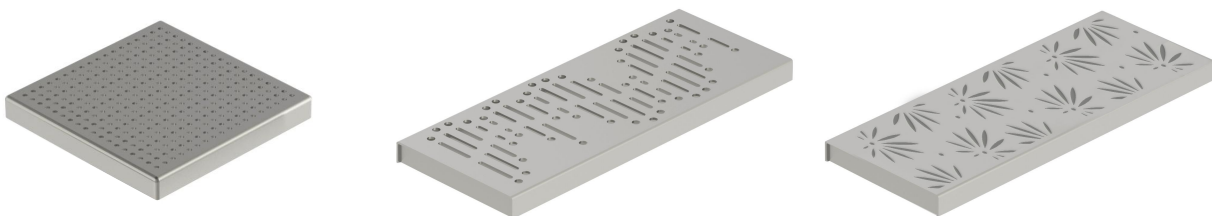

Certification And Test Report





Official Website

SUCCESS IN BUILDING, BUILDING SUCCESS



CMSA Company Limited
T: +852 2311-9980 E: info@mea-cmsa.com
www.mea-cmsa.com